
Key Features

- All-in-one myViewBoard™ suite with Whiteboard, Display, and Manager
- Pen-on-paper writing experience with Ultra Fine Touch Technology
- Front-facing dual speakers to deliver attention-grabbing sound
- · Webcam bracket easily attached with camera for better engagement
- Quad Core CPU with upgraded storage powered by Android 9.0 OS



Product **Description**

The ViewBoard® 32-2 series is an advanced model that provides a comprehensive solution for schools and teachers looking to deliver more interactive and engaging lessons. Clearer colors, more vibrant contrast, and less glare are achieved thanks to 4K UHD display's bonding technology. With 20-point touchscreen interface, users collaborate naturally either with a finger or one of the ViewBoard styluses. The display integrates Ultra Fine Touch Technology which brings a paper-like writing experience with instant response and high accuracy. The dual-tip pen support allows you to simultaneously write or draw with two different colors. Seamless software integration is assured by the built-in access to the myViewBoard suite that brings together all the hardware. With upgraded RAM and storage, ViewBoard 32-2 Series offers instant connectivity and effortless usability for classroom engagement.

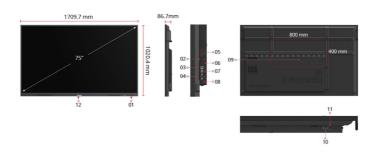



- 1. Smart Port USB™ X 2
- 2. Camera
- 3. LAN
- 4. RS232
- 5. HDMI X 2
- 6. USB 2.0

- 8. Audio Out
- 9. VESA® Wall Mount800 x 400mm
- 10. VGA
- 11. Audio In
- 12. Wi-fi Module Slot

7. Touch

Visit Us www.viewsonic.com



DISPLAY		BUNDLE SOFTWARE		
Panel Size:	75"	Basic Annotation Software:	myViewBoard Whiteboard	
Panel Type:	TFT LCD Module with DLED Backlight		myViewBoard Whiteboard for	
Display Area (mm):	1650.24mm(H) x 928.26mm(V) (74.6" diagonal)	Pro Annotation Software:	Windows (Embedded in optional Windows Slot-in PC)	
Aspect Ratio:	16:9	Wireless Presentation:	myViewBoard Display & ViewBoard Cast	
Resolution:	UHD 3840x2160(Pixels)	SPECIAL FEATURES		
Colors:	1.07B colors (8bit+FRC)	All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels.	
Brightness:	350 nits (typ.)			
Contrast Ratio:	4000:1	Simple LAN sharing between IFP	10/100M for Android &	
Response Time:	8.5ms	and slot-in device:	Slot-in PC	
Viewing Angles:	H=178, V=178typ.	Light Sensor:	Yes	
Backlight Life:	30,000 Hours (Min)	POWER		
Surface Treatment:	Hardness: 9H Anti- glare coating	Voltage:	162V-264V +/- 10%	
Orientation:	Landscape	Consumption:	On:238W(typ.) Off: ≤ 0.5W	
PLATFORM		ERGONOMICS		
Processor:	ARM quad-core	Wall Mount (VESA®):	800x400	
FIOCESSOI.	Cortex-A55	OPERATING CONDITIONS		
RAM:	4GB DDR4	Temperature (° C):	0°C to 40°C	
Storage:	32 GB	Humidity:	10% ~ 90% RH non-	
TOUCH			condensing	
Type/ Tech:	Ultra Fine Touch Technology	DIMENSIONS (W X H X D)	4740400007 /	
Touch Point:	20 points touch, 2 points writing	Physical (inch / mm):	1710×1020×87 mm / 67.3x40.2x3.4 in 1860×280×1140 mm /	
INPUT		Packaging (inch / mm):	73x11x44.9 in	
HDMI:	HDMI 2.0 x2 (3840x2160 @60Hz)	WEIGHT		
RGB / VGA:	x1	Net (lb / kg):	51.8kg/114.2lb	
Audio:		Gross (lb / kg):	65.7kg/144.8lb	
	x1	REGULATIONS		
R\$232: OPS:	x1 x1 (Optional Intel Standard OPS)	EMC/CE, CB/LVD, GOST-R / EAC, FAC, RCM, BIS, ECAS, LBL (Low Blue Light Certification), RoHS, REACH, SCIP, WEEE, TPCH, Packing waste, CA65, Green BOM, ErP-Eco		
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004)	PACKAGE CONTENTS		
OUTPUT	002/ V D- VVII 1-004)	1. Power cord / 2.Remote control with AAA battery / 3.USB		
Audio:	x1	touch cable / 4. Touch pen x 2 / 5 Compliance statement / 6. RS232		
LAN	A I	wall mount 4) / 8. HDMI cable / 9. 10. Camera plate x1		
RJ45:	x1	COMPATIBLE SLOT-IN PC		
USB		VPC12-WPO/VPC25/VPC2C/VPC27 series		
Type A:	USB2.0 Front x2; Side x2			
Type B:	x1 for HDMI/VGA touch			
SPEAKERS	/ 2/1 (3 8 9 1			
10W x 2				
TOP CAMERA PLATE				
Yes				
EMBEDDED OS				
Android 9				

Copyright © ViewSonic Corporation 2000-2023. All rights reserved.