


## Key **Features**

- Impressively large, bezel-free visual experiences
- All-in-One design without complicated setup
- Real-to-life colors and high brightness
- Immersive audio from built-in Harman Kardon speakers
- Adaptable and flexible to suit any display scenario



## Product **Description**

Gaze upon astoundingly lifelike imagery on the minimalistic 2nd Gen 135" ViewSonic® LDP135-151 All-in-One Direct View LED display. The Allin-One modular design offers an effortless installation and maintenance process. This next-generation display is upgraded with advanced features to deliver a spectacular audiovisual experience and user-forward design.Delivering 120% Rec. 709 wide color gamut, lightningfast 4,440Hz refresh rate, and a peak brightness of 600 nits, every video, presentation, or lecture will be an immersion of real-to-life color and extraordinary detail. The display is also equipped with Harman Kardon speakers, 4K/HDR/HLG support and Frame Interpolation technology for unsurpassable, immersive content delivery. At 25mm slim and lined with a 5mm frameless edge, the sleek display exudes sophistication and elegance in any modern setting. It offers flexibility and adaptability in design – with portrait and landscape installations to complement any space and scenario. The screens can be easily fused together to form an ultra-wide 32:9 video wall to deliver a seamless visual experience in epic proportions. The system control box can also be easily detached to blend into every design.

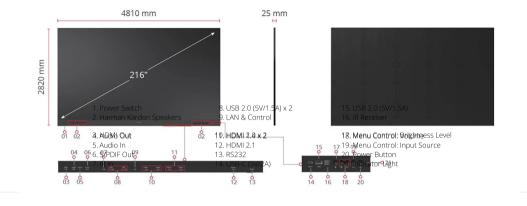

Visit Us – www.viewsonic.com

SPECIFICATION		CONTROL	
Screen Size:	216''	RJ45 (LAN control):	x1(shared with internet)
Display Area (mm):	4800 (H) x 2700(V)	USB Type A (Services):	x1(shared with USB A input)
Native Resolution:	1920x1080	RS232 (DB 9-pin female):	x1
Panel Technology:	Direct view LED	IR Receiver:	x1
LED Package Type:	SMD 3 in 1	OTHERS	
Bonding Wire:	Gold	Power Supply Voltage:	100-120V/30A~ 50/60Hz or 220- 240V/15A~ 50Hz(vary by country)
Pixel Pitch (mm):	2.50		3430W (typ), 4900W (max)< 0.5W
Refresh Rate:	4440Hz	Power Consumption:	(Sleep), < 0W (Off)
Brightness (max.):	600 nits (8 levels adjustable)	Operating Temperature:	0~40°C
Contrast Ratio (typ.):	6000:1	LED Module Quantity:	128
Orientation:	Landscape / Portrait	Ingress Protection Rating:	IP30
Viewing Angles (typ.):	H = 160, V = 160	Net Weight:	640 lbs(290 kg)
LED Lifetime (typ.):	100,000 Hours	Gross Weight:	883 lbs(400 kg)
Local Storage:	Total 64GB (56GB available storage)	Screen Dimensions (WxHxD):	189.4x111x1 inches(4810 x 2820 x 25 mm)
Embedded OS:	Android 9.0	Screen Dimensions (WxHxD)	, 189.4x111x2.2 inches(4810 x 2820 x
Resolution Support:	VGA(640 x 480) to 1080p(1920 x 1080)	with wall mount:	57 mm)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160P/60Hz	Packing Dimensions:	109.4x27.95x37 inches(2780 x 710 x 940 mm)
Horizontal Frequency:	23-120 kHz	STANDARD ACCESSORIES	
Vertical Scan Rate:	15-135 Hz	Power Cord:	x2
INPUT		LAN Cable (Cat 5A):	x1 (5m)
HDMI:	x6(HDMI 2.1 x 1, HDMI 2.0 x 2, HDMI	IR Extender Cable:	x1(3m)
HDMI:	1.4 x 2, HDMI 2.0 internal x1)	Remote Control:	x1
USB Type A:	x3(USB2.0 x3)	QSG:	x1
RJ45 Input (Internet):	x1	Wall Mount:	x1
IR in:	x1	Spare Parts:	LED PCB Unit x7
Wi-Fi Input:	2.4G/5G Hz	Maintenance Tool:	LD-MK-001 x1
USB Type C:	x1(Video input、 Power output (5V/2A))	OPTIONAL ACCESSORIES Maintenance Tool:	LD-MK-001
Audio-in (3.5mm):	x1	ViewBoard Cast Button(USB-C):	VB-WPS-001
HDBaseT:	x1(1080P@100m、4K30Hz@70m)	ViewBoard Cast Button(USB-	
OUTPUT	/	A+HDMI):	VB-WPS-003
HDMI out:	x2(HDMI 2.0 external x1,internal x1)		
Speaker:	20W x2 (harman kardon)		
Audio out (3.5mm):	x1		
LISE Type A (Bewer):	Sharad with USP input/5///1 5A x2)		

USB Type A (Power):

Shared with USB input(5V/1.5A x3)

Copyright © ViewSonic Corporation 2000-2022. All rights reserved.