

ViewSonic® VIEWBOARD ViewBoard IFP105S


Wichtigste Eigenschaften

- Ultrabreites 21:9-Verhältnis, 105-Zoll-Bildschirm in 5K-Auflösung für verbessertes Multitasking und Zusammenarbeit.
- Nahtlose Videokonferenzen mit umfassendem 8-Mikrofon-Array.
- Schreiben mit dem Stift, wie auf Papier, mit der Ultra-Fine-Touch-Technologie, mit bis zu 40 Berührungspunkten.
- Mühelose drahtlose Bildschirmfreigabe von bis zu 9 Geräten mit vCast.
- 2 USB-C Anschlüsse für verbesserte Produktivität.



Produktübersicht

The ViewBoard IFP105S delivers an expansive interactive experience with its 21:9 aspect ratio and stunning 5K resolution. The 105" display allows for multitasking with split-screen functionality, enhancing collaboration and productivity. With highly responsive 40-point touch capabilities, every input is registered naturally and intuitively. Enjoy seamless wireless screen casting and sharing through vCast. Designed for both in-person and hybrid collaboration, the ViewBoard IFP105S is an ideal solution for meeting rooms, enabling seamless presentations, ideation, and decision-making.

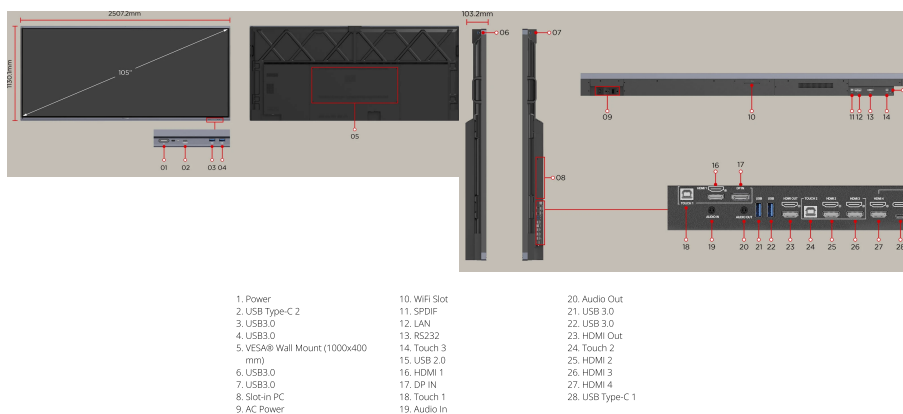

Besuchen Sie uns

www.viewsonic.com



DISPLAY

Panelgröße:	105"
Panel Typ:	TFT LCD Module with DLED Backlight, VA
Anzeigefläche (mm):	2449.92(H) x 1033.56 (V) (104.6" diagonal)
Seitenverhältnis:	21:9
Auflösung:	WUHD 5120x2160(Pixels)
Colors:	1.07B colors
Helligkeit:	400 nits
Kontrast:	4000:1(Typ.) 5000:1(Min. with DCR enabled)
Reaktionszeit:	6.5ms
Blickwinkel:	H = 178, V = 178 (Typ.)
Lebensdauer Hintergrundbeleuchtung:	50,000 Hours (Min.)
Oberflächenbehandlung:	Panel Hard Coating 3H Glass Anti-Glare 7H
Blende / Rahmen:	19.5/19.5/29.8/41.2 mm
Orientierung:	Landscape
Disclaimer:	50,000 hours backlight life at 8 hours of use per day

PLATFORM

Prozessor:	Octa-Core CPU (A76*4 + A55*4)
RAM:	8GB LPDDR
Storage:	64GB eMMC

TOUCH

Typ/ Technologie:	IR Recognition
Touch Auflösung:	32767 x 32767
Touch Punkte:	Windows: 40 Android: 20

INPUT

HDMI:	x4 (Rear x3 :HDMI 2.0 with CEC; Rear x 1 HDMI 2.1 with CEC)
DisplayPort:	1
Audio:	1
MIC (Microfon):	Built-in 8 Array Microphone
RS232:	1
OPS:	X1 OPS Slot
WiFi:	X1 Module Slot

OUTPUT

HDMI:	1
Audio:	1
SPDIF:	1

LAN

RJ45:	X2 (inx1; outx1; 1000m for Android/PC; 100m for type-C)
-------	---

USB

Typ A:	USB2.0 x 1 (Bottom) (for FW upgrade) USB3.0 x 6 (Top x 2 + Rear x 2 + Front x 2), all support Smart USB
Typ B:	3 (Bottom x 1; Rear x 2)
Typ C:	2 [Rearx1: PD65W(65W with OPS, 100W without OPS) + DP1.2 + Data + 10M/100M sharing ; Front x1:PD15W + DP1.2 + Data + 10M/100M sharing]

LAUTSPRECHER

16W x 2 + 15W x 1 subwoofer

TOP CAMERA PLATE

Yes

BETRIEBSSYSTEM

Android 13

VORINSTALLIERTE SOFTWARE

Drahtlose Anbindung mit Touch-Feedback: Viewboard Cast:	Single screen sharing with Chromecast or up to 9 devices with vCast Sender or Airplay. No additional download is required to cast using Airplay or Chromecast.
---	--

BESONDERE MERKMALE

All-in-one USB port:	Yes
Mit einem Klick zum Cloud Drive:	Yes
Einfaches LAN-Sharing zwischen IFP und Einschubgerät:	(10/100/1000M) (USB Type-C 10/100, Android & PC 10/100/1000)
Light Sensor:	x1

ENERGIE

Eingangsspannung:	100-240VAC +/- 10% Wide Range
Verbrauch:	On: 275W(typ.) / Off: <0.5W

ERGONOMICS

Montage (VESA®):	1000 x 400
-------------------	------------

OPERATING CONDITIONS

Temperatur (° C):	0°C to 40°C
Luftfeuchtigkeit:	20% ~ 80% RH non-condensing

ABMESSUNGEN (B X H X T)

Physikalisch (inch / mm):	98.71 x 44.49 x 4.06 in / 2507.2 x 1130.1 x 103.2mm
Verpackung (inch / mm):	105.19 x 51.38 x 11.02 in / 2668 x 1305 x 280mm

WEIGHT

Netto (lb / kg):	201.5lb/91.4Kg
Brutto (lb / kg):	225.1lb/115.7Kg

REGULATIONS

cTUVus,FCC/ICES003, LBL(low blue light filter), FF(Flicker free), CE EMC, CB, RoHS Green BOM, RoHS DoC, ErP, REACH SVHC List, DoC, EEL, WEEE, BSMI
--

ENERGY STAR VERSION

ES 8.0

VERPACKUNGSIHALT

1. 3m power cord by ship area
2. Remote control with AAA battery
3. 3m touch USB cable
4. Touch pen x 2
5. Quick Start Guide + Compliance statement
6. RS232 adapter
7. Clamp x 5
8. Camera Plate
9. Screw x 6 (2 for camera , 4 for wall mount)
10. HDMI cable 3m

