

UH5F Series

LG UHD Signage Captures Customer's Attention

65"	EAN CODE: 65UH5F-B - 8806098546275
55"	EAN CODE: 55UH5F-B - 8806098546213
49"	EAN CODE: 49UH5F-B - 8806098546145
43"	EAN CODE: 43UH5F-B - 8806098556151

UH5F

The UH5F Series is a UHD Signage that has been optimized for various indoor environments. It features superior UHD quality, slim design, external dust protection, and various convenience for users.

Key Features

- Superb Picture Quality
- Sleek and Practical Design
- Product Reliability
- Easy Installation




Seasonal goods
10%


Specification - UH5F Series

		65UH5F	55UH5F	49UH5F	43UH5F
Panel	Screen Size	65"	55"	49"	43"
	Panel Technology	IPS	IPS	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9	16 : 9	16 : 9
	Native Resolution	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD, RGB)
	Brightness (Typ.)	500 nit	500 nit	500 nit	500 nit
	Contrast Ratio	1,100:1	1,100:1	1,100:1	1,100:1
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	178 x 178
	Response Time	8ms (G to G)	8ms (G to G)	8ms (G to G)	8ms (G to G)
	Surface Treatment (Haze)	Haze 3%	Haze 3%	Haze 3%	Haze 3%
	Life Time (Typ.)	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Operation Hours	24 / 7	24 / 7	24 / 7	24 / 7	
Orientation	Portrait & Landscape	Portrait & Landscape	Portrait & Landscape	Portrait & Landscape	
Connectivity	Input	HDMI (3), DP, DVI-D, Audio, USB 2.0	HDMI (3), DP, DVI-D, Audio, USB 2.0	HDMI (3), DP, DVI-D, Audio, USB 2.0	HDMI (3), DP, DVI-D, Audio, USB 2.0
	Output	DP, Audio (Off/Fixed/Variable)	DP, Audio (Off/Fixed/Variable)	DP, Audio (Off/Fixed/Variable)	DP, Audio (Off/Fixed/Variable)
	External Control	RS232C In/Out, RJ45 (LAN) In, IR In	RS232C In/Out, RJ45 (LAN) In, IR In	RS232C In/Out, RJ45 (LAN) In, IR In	RS232C In/Out, RJ45 (LAN) In, IR In
Mechanical Specification	Bezel Color	Black	Black	Black	Black
	Bezel Width	9.9mm(T/R/L), 14.4mm(B)	9.9mm(T/R/L), 14.4mm(B)	9.9mm(T/R/L), 14.4mm(B)	8.4mm(T/R/L), 14.4mm(B)
	Monitor Dimension (W x H x D)	1,453.3mm x 844mm x 39.9mm	1,234.4mm x 720.9mm x 39.9mm	1,098.6mm x 644.5mm x 39.9mm	962.5mm x 568mm x 39.9mm
	Weight (Head)	28.2 kg	18.9 kg	15.4 kg	11.2 kg
	Carton Dimensions (W x H x D)	1600.0 x 1095.0 x 175.0mm	1360.0 x 835.0 x 175.0mm	1197.0 x 775.0 x 162.0mm	1060.0 x 660.0 x 152.0mm
	Packed Weight	35 kg	24.2 kg	18.8 kg	13.7 kg
Handle	No	No	No	No	
VESA™ Standard Mount Interface	300 x 300	300 x 300	300 x 300	200 x 200	
Key Feature	Internal Memory 8GB (System 4GB + Available 3.6GB), Built-in Wi-Fi, Temperature Sensor, Auto Brightness Sensor, Acceleration Sensor, Local Key Operation, Embedded CMS (USB Auto Playback, Local Contents Scheduling, Group Manager), Fail over, Image Customization (Bootting Logo, No Signal), Content Sync (RS232C, Local Network), PIP/PBP(4), Screen Share, Video Tag(4), Play via URL, OSD Rotation, Tile Mode Setting (Max. 15 x 15), Setting Data Cloning, Firmware Update by Network, SNMP 2.0, ISM Mode, Crestron Connected®1), DPM, Smart Energy Saving, Wake on LAN, Beacon, HDMI-CEC2), SI Server Setting				
Special Feature	Tilt (Max)	+30°	+30°	+30°	+30°
IP Rating	IP5x	IP5x	IP5x	IP5x	IP5x
Environmental Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power	Built-In Power
	Power Consumption	Typ. / Max. 120W / 165W (TBD) Smart Energy Saving 84W	105W / 145W 73.5W	95W / 130W 66.5W	75W / 110W 52.5W
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	O (EU Only) / Energy Star 8.0	O (EU Only) / Energy Star 8.0	O (EU Only) / Energy Star 8.0	O (EU Only) / Energy Star 8.0
Media player Compatibility	OPS Type Compatible	Yes	Yes	Yes	Yes
	External Media Player Attachable	Yes	Yes	Yes	Yes
Software Compatibility	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS	SuperSign CMS
	Control and Monitoring Software	SuperSign Control / Control+	SuperSign Control / Control+	SuperSign Control / Control+	SuperSign Control / Control+
	Signage365Care	Yes	Yes	Yes	Yes
Accessories	Basic	Remote Controller, Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender			
	Optional	Stand(ST-653T), Media Player, Wall Bracket(LSW350B), VESA Adapter(65"; 55"; 49":AM-B330S / 43":AM-B220S), OPS Kit(KT-OPSH)			

Dimenisons (unit: mm)

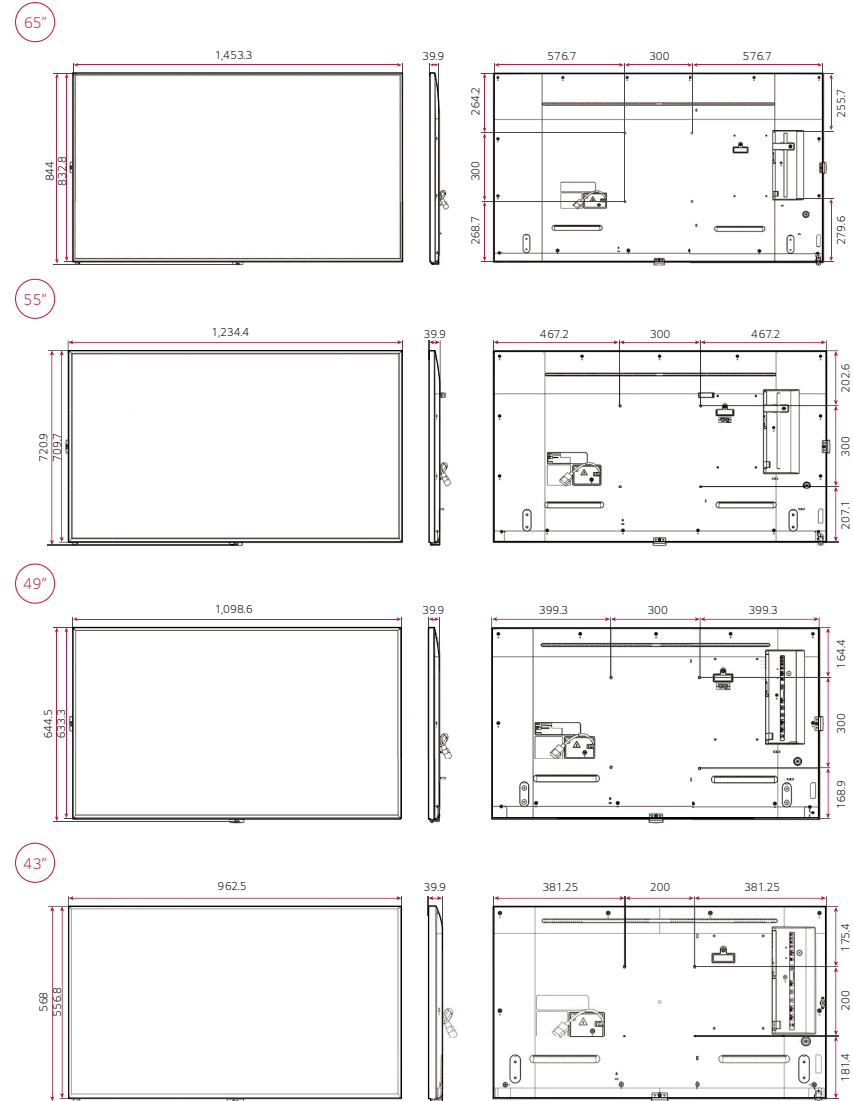

1) Network based control 2) Compatibility may differ by equipment




Download
LG C-Display+
Mobile App
Google Play Store

www.lg.com/b2b

www.youtube.com/c/LGCommercialDisplay

www.facebook.com/LGInformationDisplay

www.linkedin.com/company/LGInformationDisplay



LG may make changes to specifications and product descriptions without notice.
Copyright © 2019 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.