# LG UHD Signage Offers Lifelike Vision to Customers

With superb picture quality and cutting-edge intelligence, the UH5F/E series enlivens colors without the aid of peripherals. Its quality and brightness capture the attention of passersby.



Superb Picture Quality



Sleek and Practical Design



webOS Smart Platform




Meeting Room Solution






### **ULTRA HD Resolution**

With the resolution that is 4 times higher than FHD, it makes the color and details of the contents more vivid and realistic. In addition, the wide viewing angle applied with LG IPS Panel, provides clear contents with no distortion.

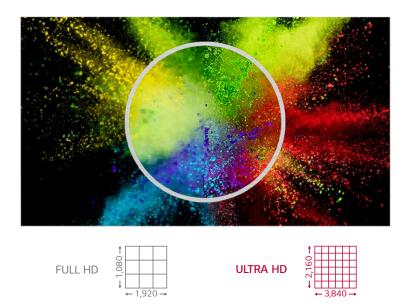

## High Efficiency Video Coding

The UH5F/E series supports HEVC\* which efficiently compresses/ decompresses high-capacity UHD contents, playing ultra-high quality videos with half the network traffic than the existing H.264 codec.




\* HEVC: High Efficiency Video Coding

# Slim Depth and Detachable Logo

Although UH5F/E series is a large-sized display, the product still has a slim depth which allows easy installation by using less space. Also, the detachable logos give users flexibility to arrange the display.

# Built-in Speakers

Contents will be enriched with sound effects from built-in speakers, without the need for purchasing or installing external speakers.

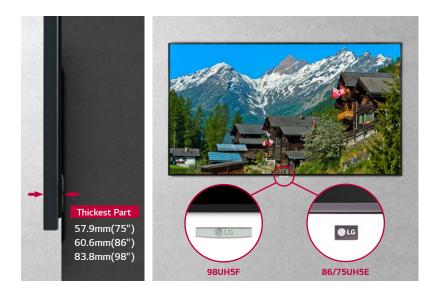




### High-Performance with webOS

Built-in Quad Core SoC can execute several tasks at once while providing smooth content playback without the need for a media player. Also LG webOS smart signage platform enhances user convenience with intuitive GUI and simple app development tools.



### Various Sensor Applications

LG webOS smart signage platform easily supports connections with external sensors such as GPIO, NFC/RFID, temperature sensors, etc, via USB plug-in. The overall cost for maintenance is reduced as there's no need to purchase additional software or media players for creating value-added solutions.

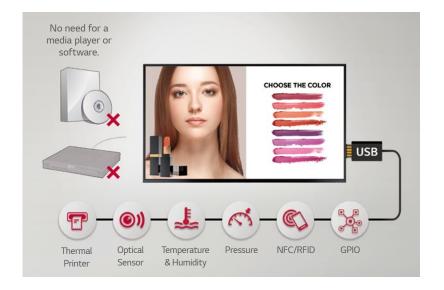

### Compatible with AV Control System

The UH5F/E series has been certified Crestron Connected® for high compatibility with professional AV controls to achieve seamless integration and automated control\*, boosting business management efficiency.



#### \* Network based control

### Compatible with Video Conference System

For the optimum visual meeting, the UH5F/E series has certified its compatibility with Cisco System that offers powerful and integrated control\* for a smarter video conference, eliminating a waste of time for setting up the picture quality or changing input on incoming calls.



<sup>\*</sup> Using an HDMI cable connection

### Multi Screen with PBP/PIP

PBP (Picture-By-Picture) features multi screen in a single display with upto 4 input sources while PIP (Picture-In-Picture) supports playing both main screen and sub screen at the same time with various layouts. This gives great flexibility to allocate space for each content source.



### Real-Time Monitoring & Control

Through the Control Manager, the embedded web monitoring solution, you can control and monitor the status of multiple UH5F/E series displays in different locations in real-time. It is available on internet-connected devices, allowing you to flexibly and rapidly respond to emergency situations anywhere.



USER CONVENIENCE

UHD Signage UH5F/E Series

# Content Sharing

Content Mirroring among devices is more convenient on a Wi-Fi network.

### Real-time Promotion


With Beacon and BLE (Bluetooth Low Energy), shop managers can provide coupons and information in real-time.

### Wireless Access Point


The UH5F/E series operates as a virtual router which can be an wireless access point for mobile devices.





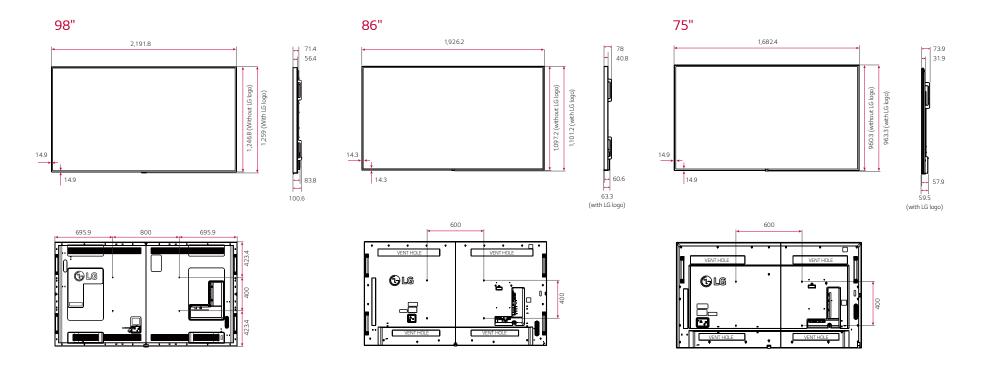

### CONNECTIVITY

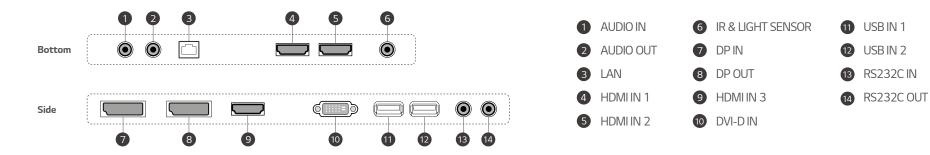




		98UH5F	86UH5E	75UH5E
Panel	Screen Size	98"	86"	75"
	Panel Technology	IPS	IPS	IPS
	Native Resolution	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	Brightness (Typ.)	500 nit	500 nit	500 nit
	Contrast Ratio	1,300 : 1	1,200 : 1	1,200 : 1
	Viewing Angle (H × V)	178 × 178	178 × 178	178 × 178
	Response Time	8 ms (G to G)	8ms (G to G)	6 ms (G to G)
	Surface Treatment (Haze)	Haze 1 %	Haze 3 %	Haze 3 %
	Operation Hours	24 Hrs	24 Hrs	24 Hrs
	Orientation	Portrait & Landscape	Portrait & Landscape	Portrait & Landscape
Connectivity	Input	HDMI (2, HDCP 2.2/1.4), HDMI (1, HDCP 1.4), DP (1, HDCP 2.2/1.3), DVI-D (1, HDCP 1.4), Audio, USB 2.0 Type A (2)	HDMI (2, HDCP 2.2/1.4), HDMI (1, HDCP 1.4), DP (1, HDCP 2.2/1.3), DVI-D (1, HDCP 1.4), Audio, USB 2.0 Type A (2)	HDMI (2, HDCP 2.2/1.4), HDMI (1, HDCP 1.4), DP (1, HDCP 2.2/1.3), DVI-D (1, HDCP 1.4), Audio, USB 2.0 Type A (2)
	Output	DP, Audio (Off / Fixed / Variable)	DP, Audio (Off / Fixed / Variable)	DP, Audio (Off / Fixed / Variable)
	External Control	RS232C (4 Pin Phone Jack) In / Out, RJ45 (LAN) In, IR In	RS232C In / Out (4 Pin Phone Jack), RJ45 (LAN) In, IR In	RS232C In / Out (4 Pin Phone Jack), RJ45 (LAN) In, IR In
	Bezel Color	Black	Black	Black
Mechanical Specification	Bezel Width	14.9 mm (Even)	14.3 mm (Even)	14.9 mm (Even)
	Monitor Dimensions (W × H × D)	2,191.8 × 1,246.8 × 83.8 mm (Without Handle, with LG logo)	1,926.2 × 1,097.2 × 60.6 mm (Without Handle and Logo)	1,682.4 × 960.3 × 57.9 mm (Without Handle and Logo)
	Weight (Head)	81.1 kg	49 kg	41.5 kg
	Packed Weight	119 kg	61.1 kg	49.5 kg
	Handle	Yes	Yes	Yes
	VESA™ Standard Mount Interface	800 × 400 mm	600 × 400 mm	600 × 400 mm
Key Feature	Internal Memory (8 GB), Built-in Wi-Fi, Temperature Sensor, Auto Brightness Sensor, Current Sensor, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Background Image (Booting Logo Image, No Signal Image), Fail Over, Sync Mode (RS-232C Sync, Local Network Sync), Multi-screen (PIP, PBP(4)), Screen Share, Play via URL, Screen Rotation, External Input Rotation, Tile Mode Setting (Max 15 x 15), Setting Data Cloning, SNMP, ISM Method, Control Manager, Smart Energy Saving, Wake on LAN, Crestron Connected® (Cisco Compatibility), Beacon, HDMI-CEC3, SI Server Setting, webRTC			
Environment Conditions	Operation Temperature	0 °C to 40 °C	0 °C to 40 °C	0 °C to 40 °C
	Operation Humidity	10 % to 80 %	10 % to 80 %	10 % to 80 %
Power	Power Supply	AC 100 - 240 V -, 50 / 60 Hz	AC 100 - 240 V -, 50 / 60 Hz	AC 100 - 240 V -, 50 / 60 Hz
	Power Type	Built-in Power	Built-in Power	Built-in Power
	Power Typ. / Max.	420 W / 560 W	215 W / 280 W	180 W / 260 W
	Consumption Smart Energy Saving	294 W	151 W	126 W
Sound	Speaker	Built-in (10 W × 2)	Built-in (10 W × 2)	Built-In (10 W × 2)
Certification	Safety	CB / NRTL	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes / No	Yes / No	Yes / Energy Star 8.0
Media Player Compatibility	OPS Type Compatible	No	Yes	Yes
	Content Management Software	SuperSign CMS	SuperSign CMS	SuperSign CMS
Software Compatibility	Control and Monitoring Software	SuperSign Control / Control+	SuperSign Control / Control+	SuperSign Control / Control+
	Signage365Care <sup>4)</sup>	Yes	Yes	Yes
Accessories	Basic	Remote Controller, Power Cord, QSG, IR / Light Sensor Receiver, DP Cable (1.8 M), Regulation Book, Phone to RS232C Gender, EYE-BOLT	Remote Controller, Power Cord, QSG, DP Cable (1.8 M), Regulation Book, Phone to RS232C Gender	Remote Controller, Power Cord, QSG, DP Cable (1.8 M), Regulation Book, Phone to RS232C Gender
	Optional	N/A	OPS Kit (KT-OPSF), Wall Mount (LSW 640A/B)	OPS Kit (KT-OPSF), Wall Mount (LSW640A/B), Touch Overlay (KT-T75E)

<sup>1)</sup> Network based control


<sup>\*</sup> Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.













<sup>2)</sup> Using an HDMI cable connection.
3) Compatibility may differ by equipment.
4) The availability can differ by region.