



2-Port USB KVM Switch



KVM-0222

H/W Version: 1

Product Overview

The KVM-0222 2-Port USB KVM Switch from LevelOne offers users with an easy to install KVM switch that can manage two computers from a single monitor, keyboard and mouse.

It allows users to access, control, boot and reboot two USB-enabled computers using a single USB keyboard, mouse and monitor.

Flexible Multimedia Feature


The KVM-0222 offers users with user-programmable simultaneous or independent PC switching. This enables users to work on one computer while simultaneously using the other computer for work or

fun. The KVM-0222 supports PC and Macintosh (MAC G3, G4, iMAC) platforms.

One Keyboard, Mouse and Monitor for Two Computers

The LevelOne KVM-0222 connects two computer systems to a single USB keyboard, USB mouse and monitor.

The KVM-0222 is a Plug-and-Play KVM switch that requires no power supply. Users simply connect the KVM switch to the USB mouse and keyboard and screen ports on each computer using the included cables.

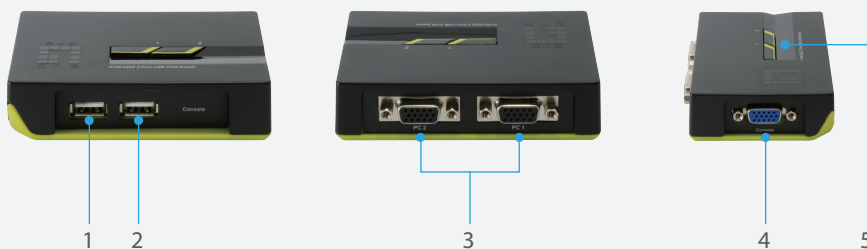

1. USB Console Port
2. USB Console Port
3. VGA PC Port
4. VGA Console Port
5. Port LED

Key Features

- Flexible switching for an uninterrupted multi-media experience across multi-platforms
- Control and manage two computers using a single USB keyboard and mouse and monitor
- Simultaneous and independent PC user-programmable switching
- High 2048 x 1536 pixels VGA resolution
- USB interface power supply
- Easy switching between computers with keyboard hotkeys push button and Software selection
- At-a-glance LED display for easy monitoring of PC activity
- True Plug-and-Play operation without any software installation or power supply
- Windows-based switching software utility included

Related Products



KVM-0422
4-Port USB KVM Switch



KVM-0212
2-Port PS/2 KVM Switch

Technical Specification

Console Port:

Keyboard: USB x 1
 Mouse: USB x 1
 Video: HDB 15-pin (Female)
 Audio Input/ Output: -
 Mic Input/ Output: -

PC Port:

2 x HDB 15-pin Female
 (VGA port with intergrated USB interface)

Monitor Supported:

VGA / SVGA / QXGA / WUXGA

LEDs:

2 LEDs

PC Selection:

Push Button / Hot Key / Auto Switching

Power:

USB Interface Power

Microphone Supported:

-

Cables:

USB KVM Combo Cable Sets (1.8m) x 2

Max. Resolution:

2048 x 1536

Scanning Interval:

10,15,20,25,30,35,40,45,50,55,60 Seconds

Operating Temp.:

0~50°C

Storage Temp:

-20~60°C

Humidity:

0~80 % RH Non-Condensing

Enclosure:

High-impact Plastic

Weight (g):

109


Dimensions (L x W x H):

96mm x 61mm x 24mm

OS Supported:

Win & Mac

Product Diagram

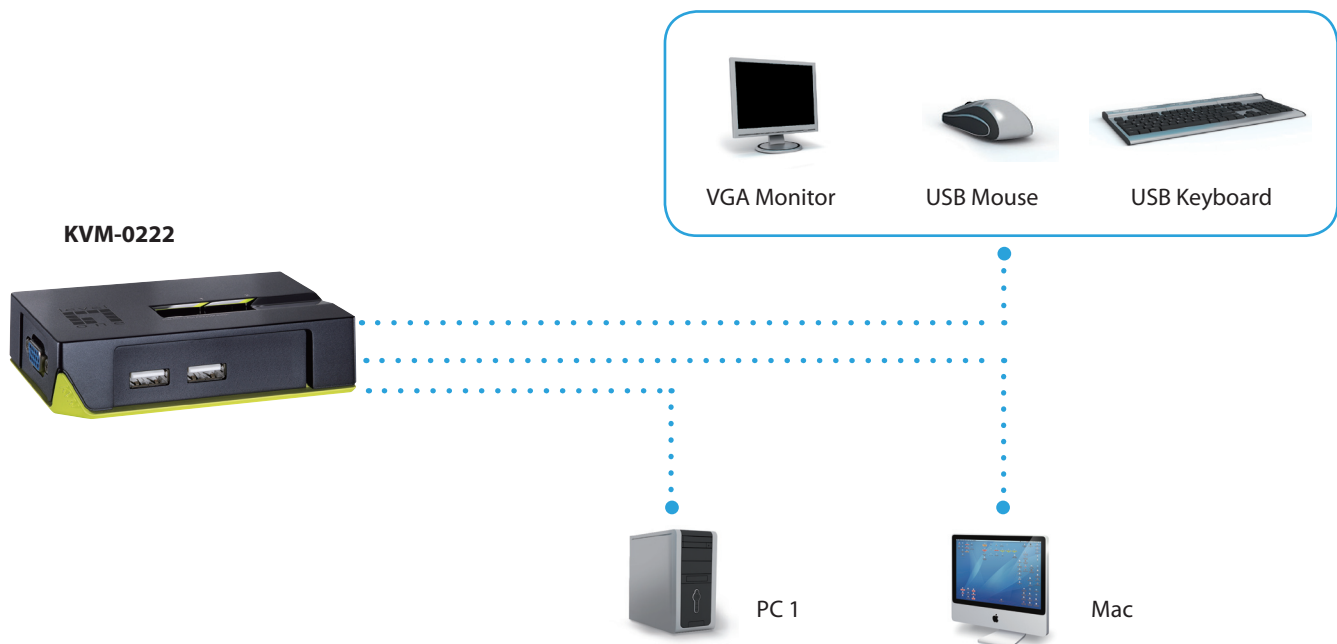

Order Information

Package Content

KVM-0222: 2-Port USB KVM Switch

KVM-0222
 KVM cable sets
 CD Manual
 Quick Installation Guide